



- For the intrinsically safe operation of a wide range of devices, such as HART transmitters, solenoid valves, sensors, zero-potential contacts and many more
- Compact, space-saving devices that are easy to install on a DIN rail
- Quick to install as barriers can be simultaneously snapped onto rail and connected to PE

WebCode **9002A**



The 9002 series INTRINSPAK two-channel safety barriers enable the intrinsically safe operation of virtually all field devices. The comprehensive portfolio and the combination of safety barriers cover a wide variety of signals. The devices are incredibly robust and require very little space. The back-up fuse is a convenient feature as it is standardised for all variants.

Technical Data

Explosion Protection

Application range (zones)	2 22
Ex interface zone	0 1 2 20 21 22
Certificate IECEx Gas	IECEX PTB 08.0057X
Certificate ATEX Gas	PTB 01 ATEX 2053 X
Certificate IECEx Dust	IECEX PTB 08.0057X
Certificate ATEX Dust	PTB 01 ATEX 2053 X
Gas explosion protection IECEx	Ex nA [ia Ga] IIC/IIB T4 Gc
Gas explosion protection ATEX	⊕ II 3 (1) G Ex nA [ia Ga] IIC/IIB T4 Gc
Dust explosion protection IECEx	[Ex ia Da] IIIC
Dust explosion protection ATEX	⊕ II (1) D [Ex ia Da] IIIC
Certificates	ATEX (PTB), Brazil (ULB), Canada (CSA), China (CQST), EAC (STV), IECEx (PTB), Korea (KGS), USA (FM), USA (UL)
EAC certificate	TS RU S-DE.GB04.B.00134
Installation	in Zone 2, Division 2 and in safe area

Safety Data

Max. voltage U_o	22 V
Max. voltage U_o	22 V 22 V 22 V
Max. current I_o	148 mA
Max. power P_o	810 mW
Max. permissible external capacitance C_o for IIC	0.165 μ F

9002/77-220-296-001 Art. No. 158881

Safety Data

Max. permissible external capacitance C_o for IIB	1.14 μ F
Max. permissible external inductance L_o for IIC	1.35 mH
Max. permissible external inductance L_o for IIB	7.2 mH
Further information	see respective certificate and operating instructions

Electrical Data

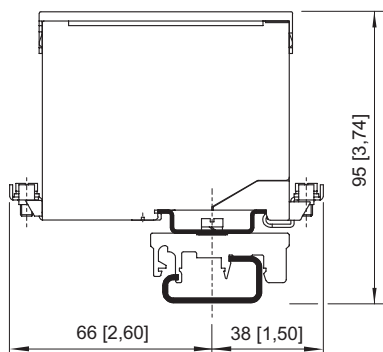
Number of channels	2
Channel	1 2 1 + 2
Nominal voltage U_N	18 V
Min. resistance R_{min}	159 Ω 159 Ω
Max. resistance R_{max}	180 Ω 180 Ω
Max. current I_o	148 mA 148 mA 146 mA
Max. power P_o	810 mW 810 mW 1630 mW
Power supply	Controlled, nominal voltage
Maximum resistance R_{max}	180 Ω
Minimum resistance R_{min}	159 Ω
Potential	star barrier
Potential Ch 1	star barrier
Potential Ch 2	star barrier
Ohm.curr.lim.usingfreq.>= 50mA	\leq 100 kHz
Ohm.curr.lim.usingfreq<= 50 mA	\leq 50 kHz
Ileak leakage current for U_N	\leq 2 μ A
Ileak leakage current for U_N 2	(Unless specified otherwise)

Channel	Nominal voltage U_N	Min. resistance R_{min}	Max. resistance R_{max}	Max. voltage U_o	Max. current I_o	Max. power P_o
1		159.00 Ω	180.00 Ω	22.00 V	148.0 mA	810.000 mW
2		159.00 Ω	180.00 Ω	22.00 V	148.0 mA	810.000 mW
1 + 2	18.00 V			22.00 V	146.0 mA	1630.000 mW

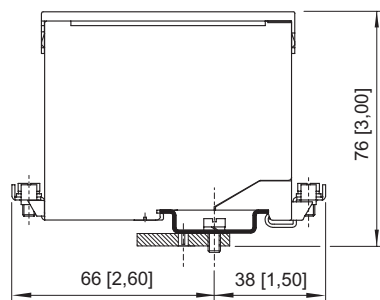
Ambient Conditions

Min. ambient temperature	-20 $^{\circ}$ C
Max. ambient temperature	+50 $^{\circ}$ C
Ambient temperature	-20 $^{\circ}$ C ... +50 $^{\circ}$ C
Min. storage temperature	-20 $^{\circ}$ C
Max. storage temperature	+75 $^{\circ}$ C

9002/77-220-296-001 Art. No. 158881









Mounting on DIN rail NS 32 by means of adaptor and mounting attachment, moulded plastic




Mounting on mounting plate by means of adaptor

Accessories and Spare Parts


		Art. No.
Back-up fuse		
	For all safety barriers Series 9001, 9002 and 9004 unit: 5 pcs.	158964
Holder for label		
	Transparent cover for labelling	158977
Labelling paper		
	Perforated, for typing Format: DIN A4 Packaging unit: 80 pieces	158973
Adaptor		
	Adaptor allows installation of a safety barrier Series 900x on a mounting plate of a previous series.	158826
Mounting attachment moulded plastic		
	Enables mounting of safety barrier on a G-rail.	165283
DIN rail		
	NS35/15 (meter length)	103714

9002/77-220-296-001 Art. No. 158881


Earth terminal

		Art. No.
	USLKG 5 (wire range 4 mm ²) Terminal enables connection of protective conductors to DIN rail. Colour green-yellow.	112760
	USLKG 6 N (wire range 6 mm ²) Terminal enables connection of protective / earthing conductors to DIN rail. Colour green-yellow.	112599

Fuse holder

		Art. No.
	Fuse holder is snapped onto the side of the safety barrier and can be equipped with up to 5 back-up fuses (replacement).	158834

Insulating stand off

		Art. No.
	Suitable for DIN rail NS35/15, allows electrically insulated mounting of DIN rail from mounting plate.	158828

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.