




MONITOR/FR-1 / 23-60VAC/DC

Evaluation systems, power supplies

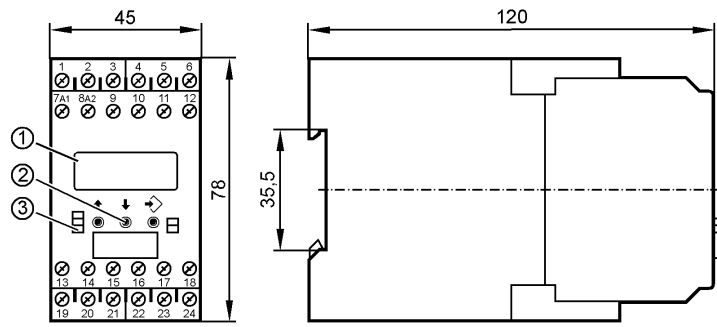

- 1: LCD display; 7/14-segment
2: Programming buttons
3: LEDs



Product characteristics

MONITOR

FR-1

Housing for DIN rail mounting

2 relay outputs

2 transistor outputs

Analog output

0/4...20 mA

programmable

Test function without external frequency

Key function

Application

Application

single pulse evaluation system with μ processor for frequency; rotational speed; speed and machine cycles

Switching function

2 switch points for monitoring overspeed/underspeed and acceptable range

Electrical data

Nominal voltage [V]

23...60 AC/DC (50...60 Hz) / 27 DC (typ. 24 DC)

Voltage tolerance [%]

-20...+10

Power consumption [VA]

5 (3 W)

Inputs

Inputs

pnnpnpn; NAMUR (24 V)
auxiliary supply: typ. 24 V DC / 15 mA; short-circuit protected
threshold pnp: > 12 V on; < 5 V off
threshold npn: > 15 V off; < 8 V on
input frequency (max): 5 kHz (corresponds to min. pulse length / space 0.1 ms)

Outputs

Relay

Contact rating

6 A (250 V AC); B300, R300

Transistor

Transistor outputs

pnnp; external supply
switching voltage/current: 24 V DC / max. 15 mA; short-circuit protected

analog

Analog output

0/4...20 mA

Max. load [Ω]

500

limitation: 20.5 mA; accuracy: 1 % (of the final value)

Measuring / setting range	
Setting range [pulses/min.]	1...60000 (0.1...1000 Hz)
Accuracy / deviations	
Measuring error [% of the final value]	< 1
Environment	
Ambient temperature [°C]	-20...60
Storage temperature [°C]	-25...80
Max. relative air humidity [%]	75 (35°C)
Protection housing / terminals	IP 50 / IP 20
Tests / approvals	
EMC	EN 61010 : 2001
	EMC 89/336/EEC
	EN 61000-6-3 : 2007
	EN 61000-6-2 : 2005
Mechanical data	
Housing materials	plastics
Weight [kg]	0.375
Displays / operating elements	
Input pulses LED	yellow
Output status indication LED	green (lights when the relay is energised / the transistor is closed)
Function display LED	LCD display; 7/14-segment
Electrical connection	
Connection	dual-chamber terminals 2 x 2.5 mm ² (2 x AWG 14)
Wiring	
1: DC Supply voltage (L-)	
2: DC Supply voltage (L+)	
3: supply transistor outputs (L+)	
4: sensor signal pnp	
5: DC Sensor supply (L+)	
6: DC Sensor supply (L-)	
7: AC/DC Supply voltage	
8: AC/DC Supply voltage	
9: n.c.	
10: sensor signal npn	
11: n.c.	
12: n.c.	
13: Relay 1 (common)	
14: Relay 1 (normally open)	
15: Relay 1 (normally closed)	
16: transistor output 1 pnp	
17: Reset 1 pnp	
18: Reset 2 pnp	
19: Relay 2 (common)	
20: Relay 2 (normally open)	
21: Relay 2 (normally closed)	
22: analog output (+)	
23: analog output (-)	
24: transistor output 2 pnp	
Remarks	
Remarks	overvoltage category II; degree of soiling 2
Pack quantity [piece]	1


ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — DD2004 — 28.08.2012

no longer available - archive entryArticle available until 31 March 2014 no longer available - archive entryDiscontinued article

ecomat200

DD2004



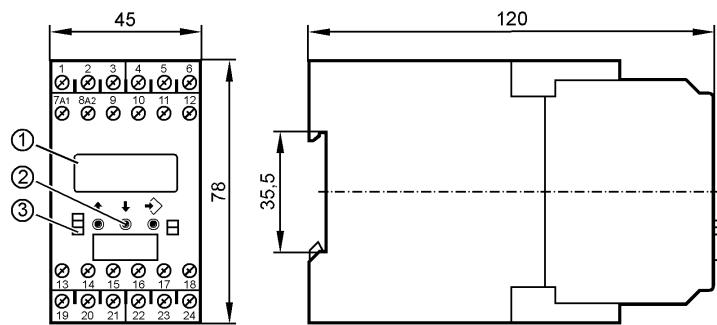

- 1: LCD display; 7/14-segment
2: Programming buttons
3: LEDs



Product characteristics
MONITOR

FR-1	
Housing for DIN rail mounting	
2 relay outputs	
2 transistor outputs	
Analog output	
0/4...20 mA	
programmable	
Test function without external frequency	
Key function	
Application	
Application	single pulse evaluation system with μ processor for frequency; rotational speed; speed and machine cycles
Switching function	2 switch points for monitoring overspeed/underspeed and acceptable range
Electrical data	
Nominal voltage [V]	23...60 AC/DC (50...60 Hz) / 27 DC (typ. 24 DC)
Voltage tolerance [%]	-20...+10
Power consumption [VA]	5 (3 W)
Inputs	
Inputs	pnp/npn; NAMUR (24 V) auxiliary supply: typ. 24 V DC / 15 mA; short-circuit protected threshold pnp: > 12 V on; < 5 V off threshold npn: > 15 V off; < 8 V on input frequency (max): 5 kHz (corresponds to min. pulse length / space 0.1 ms)
Outputs	
Relay	
Contact rating	6 A (250 V AC); B300, R300
Transistor	
Transistor outputs	pnp; external supply switching voltage/current: 24 V DC / max. 15 mA; short-circuit protected
analog	
Analog output	0/4...20 mA
Max. load [Ω]	500
limitation: 20.5 mA; accuracy: 1 % (of the final value)	
Measuring / setting range	
Setting range [pulses/min.]	1...60000 (0.1...1000 Hz)
Accuracy / deviations	
Measuring error [% of the final value]	< 1

Environment		
Ambient temperature	[°C]	-20...60
Storage temperature	[°C]	-25...80
Max. relative air humidity	[%]	75 (35°C)
Protection housing / terminals		IP 50 / IP 20
Tests / approvals		
EMC	EN 61010	: 2001
	EMC 89/336/EEC	
	EN 61000-6-3	: 2007
	EN 61000-6-2	: 2005
Mechanical data		
Housing materials		plastics
Weight	[kg]	0.375
Displays / operating elements		
Input pulses	LED	yellow
Output status indication	LED	green (lights when the relay is energised / the transistor is closed)
Function display	LED	LCD display; 7/14-segment
Electrical connection		
Connection		dual-chamber terminals 2 x 2.5 mm ² (2 x AWG 14)
Wiring		
1: DC Supply voltage (L-)		
2: DC Supply voltage (L+)		
3: supply transistor outputs (L+)		
4: sensor signal pnp		
5: DC Sensor supply (L+)		
6: DC Sensor supply (L-)		
7: AC/DC Supply voltage		
8: AC/DC Supply voltage		
9: n.c.		
10: sensor signal npn		
11: n.c.		
12: n.c.		
13: Relay 1 (common)		
14: Relay 1 (normally open)		
15: Relay 1 (normally closed)		
16: transistor output 1 pnp		
17: Reset 1 pnp		
18: Reset 2 pnp		
19: Relay 2 (common)		
20: Relay 2 (normally open)		
21: Relay 2 (normally closed)		
22: analog output (+)		
23: analog output (-)		
24: transistor output 2 pnp		
Remarks		
Remarks		overvoltage category II; degree of soiling 2
Pack quantity	[piece]	1