



Inductive sensor

II-3010-BPOG

Article no longer available - archive entry

Alternative articles: II5369

When selecting an alternative article and accessories please note that technical data may differ!



Product characteristics

Electrical design	PNP
Output function	normally open
Sensing range [mm]	10
Housing	Threaded type
Dimensions [mm]	M30 x 1.5 / L = 81

Electrical data

Operating voltage [V]	10...55 DC
Protection class	II
Reverse polarity protection	no

Outputs

Electrical design	PNP
Output function	normally open
Max. voltage drop switching output DC [V]	1
Max. leakage current [mA]	7
Permanent current rating of switching output DC [mA]	400
Switching frequency DC [Hz]	50
Short-circuit protection	no
Overload protection	no

Monitoring range

Sensing range [mm]	10
Real sensing range Sr [mm]	10 ± 10 %
Operating distance [mm]	0...8.1

II5004



Inductive sensor

II-3010-BPOG

Accuracy / deviations

Correction factor	steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminum: 0.4 / copper: 0.3	
Hysteresis [% of Sr]		1...15
Switch-point drift [% of Sr]		-10...10

Operating conditions

Ambient temperature [°C]	-25...80
Protection	IP 67

Tests / approvals

EMC	EN 60947-5-2	
	EN 55011	class B

Mechanical data

Housing	Threaded type
Mounting	flush mountable
Dimensions [mm]	M30 x 1.5 / L = 81
Thread designation	M30 x 1.5
Material	PBT

Displays / operating elements

Display	Switching status	1 x LED, yellow
---------	------------------	-----------------

Accessories

Items supplied	lock nuts: 2
----------------	--------------


Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Cable: 2 m, PVC; 3 x 0.5 mm²

Connection

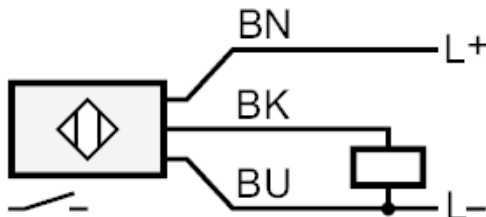

Core colors :

BK =	black
BN =	brown
BU =	blue