


E20505



Fiber optic through beam sensor

FE-00-M-V-M4

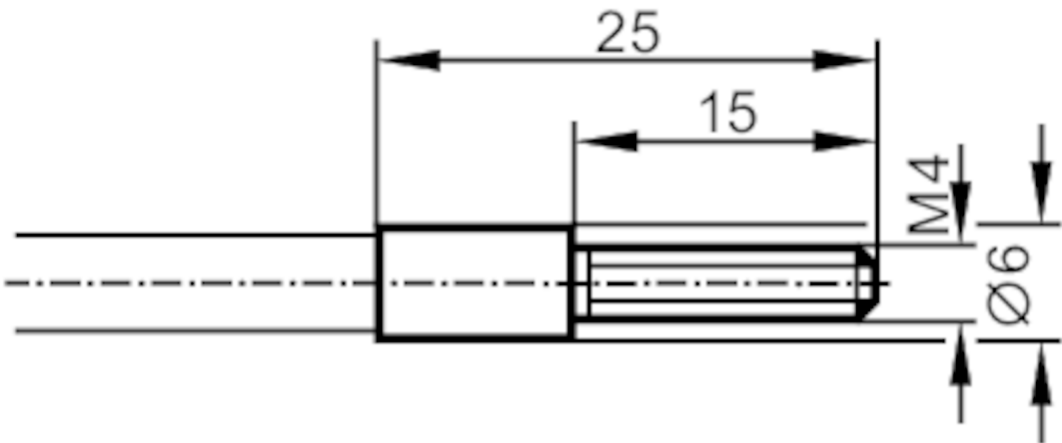

Application		
Function principle		Through-beam sensor
Monitoring range		
Range with fiber optic amplifier type		OKF; OUF; OOF
OKF		
Range of fiber optics	[mm]	120
OOF		
Range of fiber optics	[mm]	400
OUF		
Range of fiber optics	[mm]	120
Operating conditions		
Ambient temperature	[°C]	-20...150

E20505



Fiber optic through beam sensor

FE-00-M-V-M4

Mechanical data	
Weight [g]	68
Version of sensing head	straight
Sensing head thread	M4
Sensing head length [mm]	15
Total length [mm]	600
Min. bending radius [mm]	20
Fiber arrangement	
Fiber material	glass
Fiber head material	stainless steel (1.4305 / 303)
Fiber sheath material	metal silicone
Accessories	
Items supplied	Hexagon nuts: 4 x M4, stainless steel
	tooth lock washers: 4
	Knurled nut: 1 x M11
Remarks	
Pack quantity	1 pcs.