

Repeater KFD0-CS-Ex1.52


- 1-channel isolated barrier
- 24 V DC supply (loop powered)
- Current input/output 4 mA ... 20 mA
- Accuracy 0.1 %
- Entity parameter $I_o/I_{sc} = 0$ mA



Function

This isolated barrier is used for intrinsic safety applications. It is loop-powered and repeats a 4 mA ... 20 mA signal from a current source inside a hazardous area to the safe area (It does not provide power for transmitters inside the hazardous area.). The 25.2 V, 0 mA entity parameters make it easy to design intrinsically safe systems.

Connection

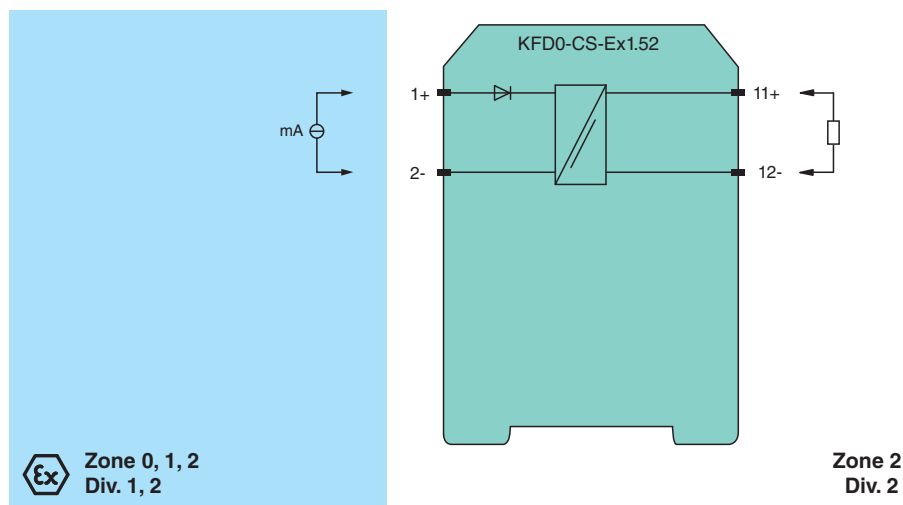

Technical Data

General specifications

Signal type	Analog input
-------------	--------------

Supply

Rated voltage	U_r	loop powered
Power dissipation		75 mW
Power consumption		500 mW

Control circuit

Connection	terminals 11+, 12-
Voltage	4 ... 24 V DC for 4 V < U_{in} < 24 V: $0.97 \times U_{in}$ - (85 x current in A) - 1.3
Current	4 ... 20 mA

Field circuit

Connection	terminals 1+, 2-
------------	------------------

Technical Data

Transmission range		current: 4 ... 24 mA voltage: 4 ... 24 V DC
Transfer characteristics		
Accuracy		0.1 %
Deviation		
After calibration		± 20 µA incl. calibration, linearity, hysteresis and load fluctuations at 20 °C (68 °F), $U_{in} \leq 20$ V +20 µA/-50 µA incl. calibration, linearity, hysteresis and load fluctuations at 20 °C (68 °F), 20 V < U_{in} < 24 V
Influence of ambient temperature		± 1 µA/K (0 ... 50 °C (32 ... 122 °F)), $U_{in} \leq 12$ V ± 2 µA/K (0 ... 60 °C (32 ... 140 °F)), $U_{in} \leq 18$ V ± 5 µA/K (-20 ... 60 °C (-4 ... 140 °F)), $U_{in} \leq 24$ V
Rise time		≤ 10 ms at 4 ... 20 mA and 250 Ω load
Galvanic isolation		
Input/Output		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Indicators/settings		
Labeling		space for labeling at the front
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)
Conformity		
Electromagnetic compatibility		NE 21:2011
Degree of protection		IEC 60529:2001
Protection against electrical shock		UL 61010-1:2012
Ambient conditions		
Ambient temperature		-20 ... 60 °C (-4 ... 140 °F)
Mechanical specifications		
Degree of protection		IP20
Connection		screw terminals
Mass		approx. 100 g
Dimensions		20 x 119 x 115 mm (0.8 x 4.7 x 4.5 inch) , housing type B2
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001
Data for application in connection with hazardous areas		
EU-type examination certificate		BASEEFA 03 ATEX 0141
Marking		Ⓔ II (1)GD, I (M1) [Ex ia Ga] IIC, [Ex ia Da] IIC, [Ex ia Ma] I (-20 °C ≤ T _{amb} ≤ 60 °C) , [circuit(s) in zone 0/1/2]
Voltage	U _o	25.2 V DC
Current	I _o	0 mA
Output		
Maximum safe voltage	U _m	253 V _{eff} (Attention! The rated voltage can be lower.)
Certificate		TÜV 99 ATEX 1499 X
Marking		Ⓔ II 3G Ex nA II T4 [device in zone 2]
Galvanic isolation		
Input/Output		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Directive conformity		
Directive 2014/34/EU		EN 60079-0:2012+A11:2013 , EN 60079-11:2012 , EN 60079-15:2010
International approvals		
FM approval		
Control drawing		116-0129
UL approval		
Control drawing		116-0173 (cULus)
IECEx approval		
IECEx certificate		IECEx BAS 08.0059
IECEx marking		[Ex ia Ga] IIC , [Ex ia Da] IIC , [Ex ia Ma] I
General information		


Release date: 2020-09-23 Date of issue: 2020-09-23 Filename: 183892_eng.pdf

Technical Data

Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .
---------------------------	---

Assembly

Front view

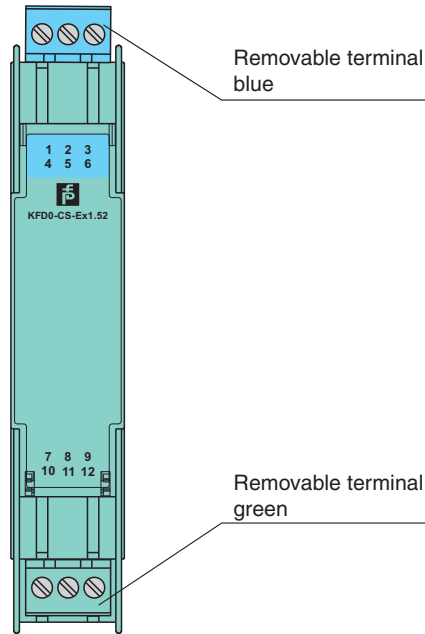

Release date: 2020-09-23 Date of issue: 2020-09-23 Filename: 183892_eng.pdf