


RM9000



Absolute multiturn encoder with solid shaft

RMS0024-C24/US

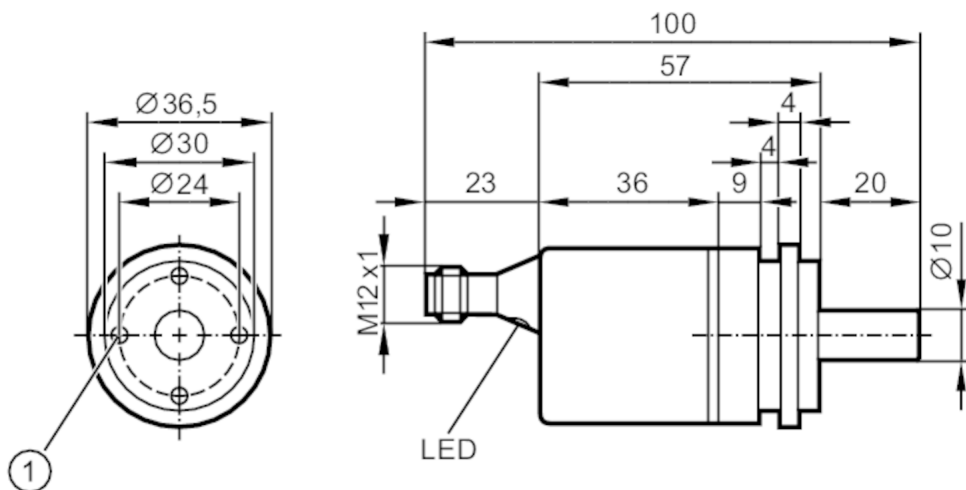

1 M4 Depth 6 mm



Product characteristics

Resolution	4096 steps; 4096 revolutions; 24 bit
Communication interface	CAN
Shaft design	solid shaft
Shaft diameter [mm]	10

Application

Function principle	absolute
Revolution type	multiturn

Electrical data

Operating voltage [V]	9...30 DC; (cULus - Class 2 source required)
Current consumption [mA]	< 100; ((10 V DC) ; ≤ 50 (24 V DC))
Protection class	III
Reverse polarity protection	yes

Outputs

Short-circuit protection	yes
Code	binary

Measuring/setting range

Resolution	4096 steps; 4096 revolutions; 24 bit
------------	--------------------------------------

Accuracy / deviations

Accuracy [°]	0.08
--------------	------

Software / programming

Parameter setting options	CAN parameter; scaling; preset; Baud rate; Direction of rotation; Node ID
---------------------------	---

Interfaces


Communication interface	CAN
-------------------------	-----

RM9000



Absolute multiturn encoder with solid shaft

RMS0024-C24/US

CAN		
Protocol	CANopen	
Factory settings	Baud rate: 125 kBit/s	
	node ID: 32	
Version	DSP - 406 V3.1; DS 301 V4.02; DS 306 V2.0	
Operating conditions		
Ambient temperature	[°C]	-40...85
Protection	IP 68; IP 69K	
Tests / approvals		
Shock resistance		200 g (11 ms)
Vibration resistance		30 g (10...1000 Hz)
MTTF	[years]	240
Mechanical data		
Weight	[g]	270.9
Dimensions	[mm]	Ø 36.5 / L = 100
Material	flange: aluminum; housing cap: steel scratch-resistant cathodic dip coating	
Max. revolution, mechanical [U/min]		6000
Max. starting torque	[Nm]	5
Reference temperature torque	[°C]	20
Shaft design	solid shaft	
Shaft diameter	[mm]	10
Shaft material	steel (1.4104)	
Max. shaft load axial (at the shaft end)	[N]	180
Max. shaft load radial (at the shaft end)	[N]	180
Fixing flange	Synchro-flange	
Displays / operating elements		
Display	Preoperational Mode	LED, green
	Operational Mode	LED, green flashing
	Error message	LED, red flashing
Electrical connection		
Connector: 1 x M12, axial; coding: A		
		

RM9000



Absolute multiturn encoder with solid shaft

RMS0024-C24/US

1	CAN_GND
2	VBBc
3	GND (PE)
4	CAN_High
5	CAN_Low