

IM5073




Inductive sensor

IMC4020UCPKG/K1/SC/US-100-DPA

Article no longer available - archive entry

Alternative articles: IM5124
When selecting an alternative article and accessories please note that technical data may differ!

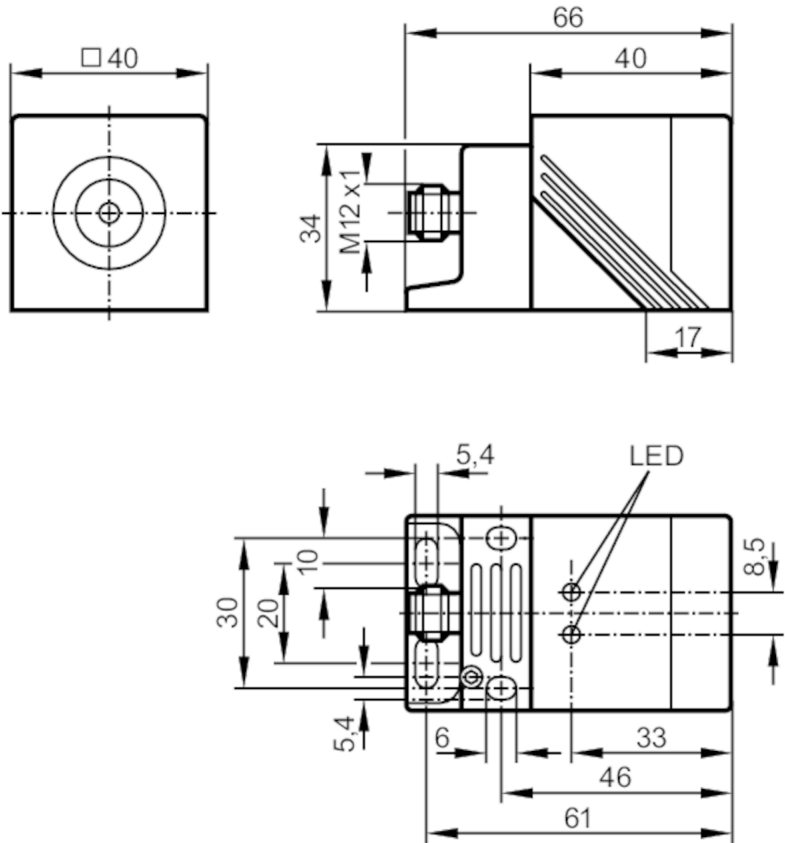

Product characteristics	
Electrical design	PNP
Output function	complementary
Sensing range [mm]	20
Housing	rectangular
Dimensions [mm]	40 x 40 x 66
Application	
System	gold-plated contacts; correction factor = 1; weld coated
Electrical data	
Operating voltage [V]	10...36 DC
Current consumption [mA]	20; (24 V)
Protection class	II
Reverse polarity protection	yes

IM5073



Inductive sensor

IMC4020UCPKG/K1/SC/US-100-DPA

Outputs		
Electrical design	PNP	
Output function	complementary	
Max. voltage drop switching output DC [V]	2.5	
Permanent current rating of switching output DC [mA]	250	
Switching frequency DC [Hz]	200	
Short-circuit protection	yes	
Type of short-circuit protection	yes (non-latching)	
Overload protection	yes	
Monitoring range		
Sensing range [mm]	20	
Real sensing range Sr [mm]	20 ± 10 %	
Operating distance [mm]	0...16.2	
Accuracy / deviations		
Correction factor	steel: 1 / stainless steel: 1.1 / brass: 1.1 / aluminum: 1.1 / copper: 1.1	
Hysteresis [% of Sr]	3...15	
Switch-point drift [% of Sr]	-10...10	
Correction factor = 1	yes	
Operating conditions		
Ambient temperature [°C]	-25...70	
Protection	IP 67	
Tests / approvals		
EMC	EN 60947-5-2	class B
	EN 55011	
Mechanical data		
Housing	rectangular	
Mounting	flush mountable	
Dimensions [mm]	40 x 40 x 66	
Material	housing: PPE; sensing face: PPE weld coated; end cap: PPS; clamp: PPS	
Displays / operating elements		
Display	Switching status	1 x LED, yellow
	Power	1 x LED, green
Accessories		
Items supplied	Mounting bracket: 1	
	Allen key: 1	
Remarks		
Pack quantity	1 pcs.	
Electrical connection - plug		
Connector: 1 x M12; Contacts: gold-plated		

IM5073

Inductive sensor

IMC4020UCPKG/K1/SC/US-100-DPA



Connection

