


AS-Interface ClassicLine module

ClassicLineVA 4AO (C) M12 IP67

Article no longer available - archive entry

Alternative articles: AC5218 or AC2518

When selecting an alternative article and accessories please note that technical data may differ!

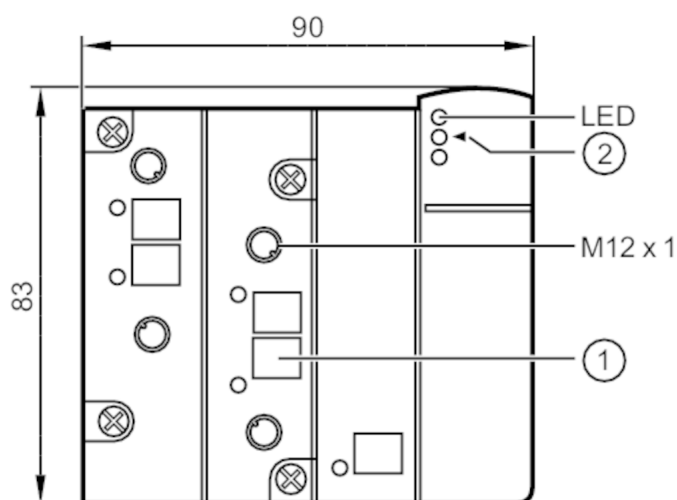

- 1 panel for labelling
2 fixture infrared adapter



Application

Application	field installation
-------------	--------------------

Electrical data

Operating voltage	[V]	26.5...31.6 DC
Current consumption	[mA]	130...180; (External supply)
Max. current consumption from AS-i	[mA]	180; (with external supply: 50 mA)
Reverse polarity protection		yes
Additional voltage supply	[V]	24 DC
Additional voltage supply		optional

Inputs / outputs

Number of inputs and outputs	Number of analog outputs: 4
------------------------------	-----------------------------


Outputs

Voltage range DC	[V]	24; (to PELV)
Number of analog outputs		4; (Anschluss von 2-Draht-Aktuatoren)
Analog current output	[mA]	0...20
Max. load	[Ω]	600
Short-circuit proof		yes
Resolution of analog output		16 (1 bit = 1 μA)
Actuator supply outputs		AS-i / AUX



AS-Interface ClassicLine module

ClassicLineVA 4AO (C) M12 IP67

Operating conditions		
Ambient temperature	[°C]	0...70
Storage temperature	[°C]	-20...85
Protection		IP 67
Tests / approvals		
EMC	EN 50295	
	EN 61000-6-4	: 2001
	EN 61000-6-2	: 2001
AS-i classification		
AS-i addressing	Addressing socket; IR addressing possible	
AS-i profile	S-7.3.6	
AS-i I/O configuration	[hex]	7
AS-i ID code	[hex]	3.6
Mechanical data		
Weight	[g]	226
Type of mounting	AS-i interface to FC/FC-E lower parts	
Material	PBT; sealing: FKM; screws: stainless steel	
Displays / operating elements		
Display	Power	LED, green Voltage AS-i / 24 V AUX
	errors	LED, red
	Function	LED, yellow Channels AO1...AO4
Accessories		
Accessories (optional)	Module lower part	
Remarks		
Pack quantity	1 pcs.	
Electrical connection		
Connector: M12; coding: A		
		
1	AO+ analog output	
2	n.c.	
3	AO- analog output 0V	
4	n.c.	
5	functional earth	