

DIODE MODULE

DD90F/KD90F

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



UL:E76102(M)

Power Diode Module **DD90F** series are designed for various rectifier circuits. **DD90F** has two diode chips connected in series in 25mm (1inch) width package and the mounting base is elctrically isolated from elements for simple heatsink construction. Wide voltage rating up to, 1600V is available for various input voltage.

- Isolated mounting base
- Two elements in a package for simple (single and three phase) bridge connections
- Highly reliable glass passivated chips
- High surge current capability

(Applications)

Various rectifiers, Battery chargers, DC motor drives

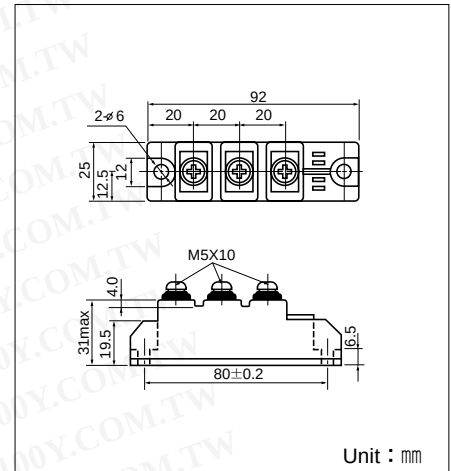

Maximum Ratings

(T_j=25°C unless otherwise specified)


Symbol	Item	Ratings				Unit
		DD90F40	DD90F80	DD90F120	DD90F160	
V _{RRM}	Repetitive Peak Reverse Voltage	400	800	1200	1600	V
V _{RSM}	Non-Repetitive Peak Reverse Voltage	480	960	1300	1700	V

Symbol	Item		Conditions	Ratings	Unit
I _{F(AV)}	Average Forward Current		Single phase, half wave, 180° conduction, T _c : 93°C	90	A
I _{F(RMS)}	R.M.S. Forward Current		Single phase, half wave, 180° conduction, T _c : 93°C	140	A
I _{FSM}	Surge Forward Current		1/2 cycle, 50/60Hz, peak value, non-repetitive	2100/2300	A
I ² t	I ² t		Value for one cycle of surge current	22000	A ² S
V _{ISO}	Isolation Breakdown Voltage (R.M.S)		A.C.1minute	2500	V
T _j	Junction Temperature			-40 to +125	°C
T _{stg}	Storage Temperature			-40 to +125	°C
	Mounting Torque	Mounting (M5)	Recommended Value 1.5-2.5 (15-25)	2.7 (28)	N·m
		Terminal (M5)	Recommended Value 1.5-2.5 (15-25)	2.7 (28)	(kgf·cm)
	Mass			170	g


Electrical Characteristics

Symbol	Item	Conditions	Ratings	Unit
I _{RRM}	Repetitive Peak Reverse Current, max.	at V _{DRM} , single phase, half wave. T _j =125°C	20	mA
V _{FM}	Forward Voltage Drop, max.	Forward current 285A, T _j =25°C, Inst. measurement	1.40	V
R _{th(j-c)}	Thermal Impedance, max.	Junction to case	0.27	°C/W


Maximum Forward Characteristics

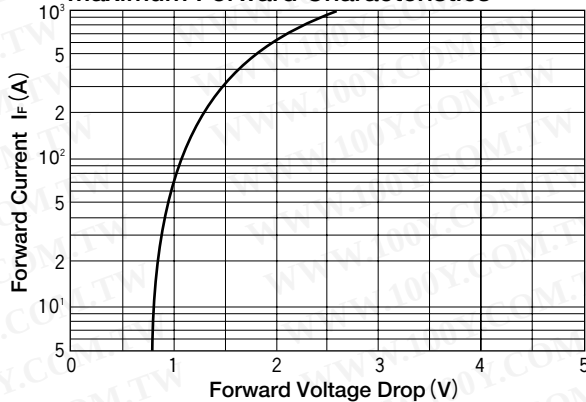


Average Forward Current vs. Power Dissipation

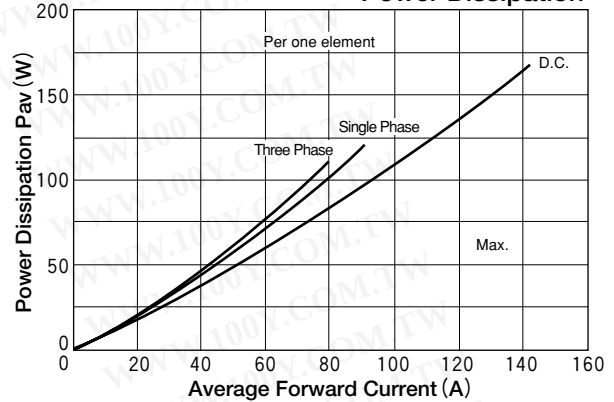


Average Forward Current vs. Allowable Case Temperature

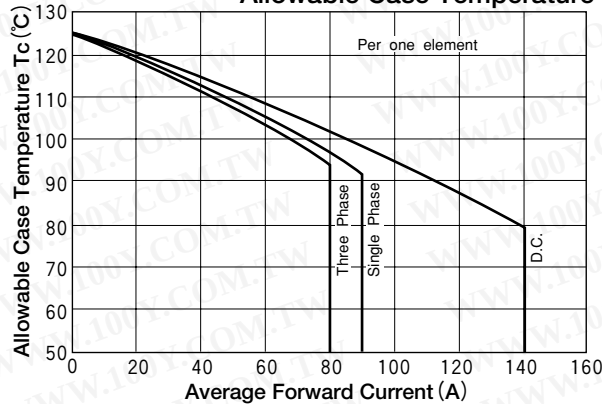


Cycle Surge Forward Current Rating (Non-Repetitive)

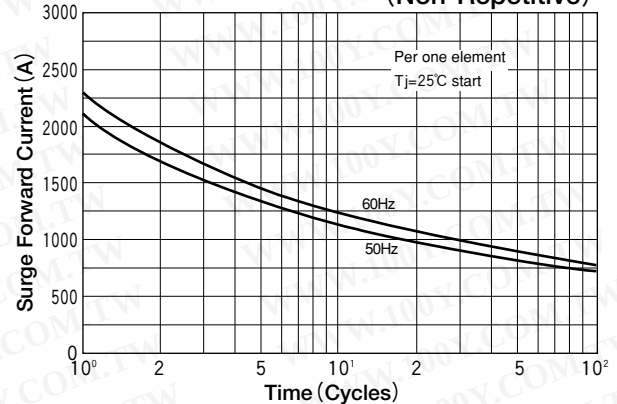

Transient Thermal Impedance

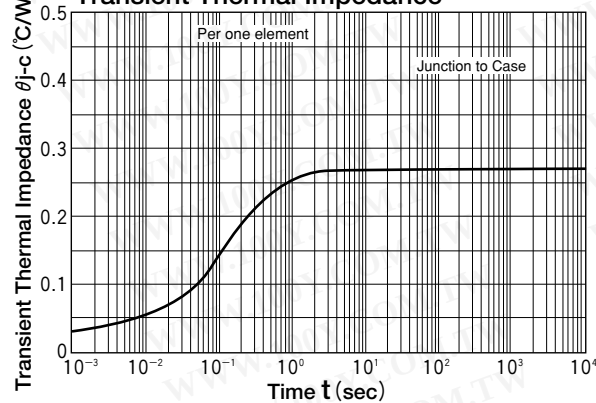

B2; Two Pluse Bridge connection

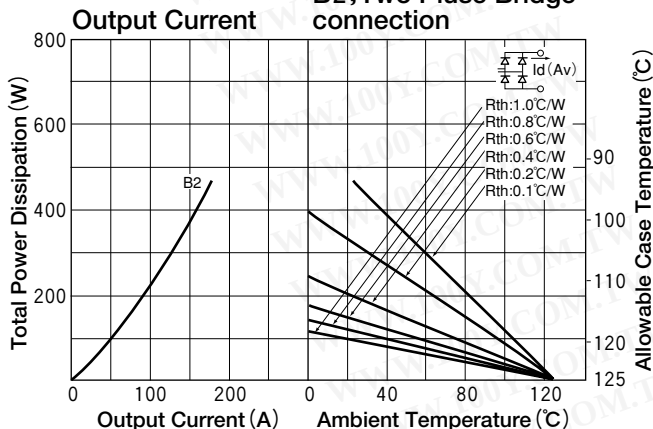

B6; Six pulse Bridge connection

