


AC2412



AS-Interface CompactLine module

CompactModule 4DI 4DO T M12

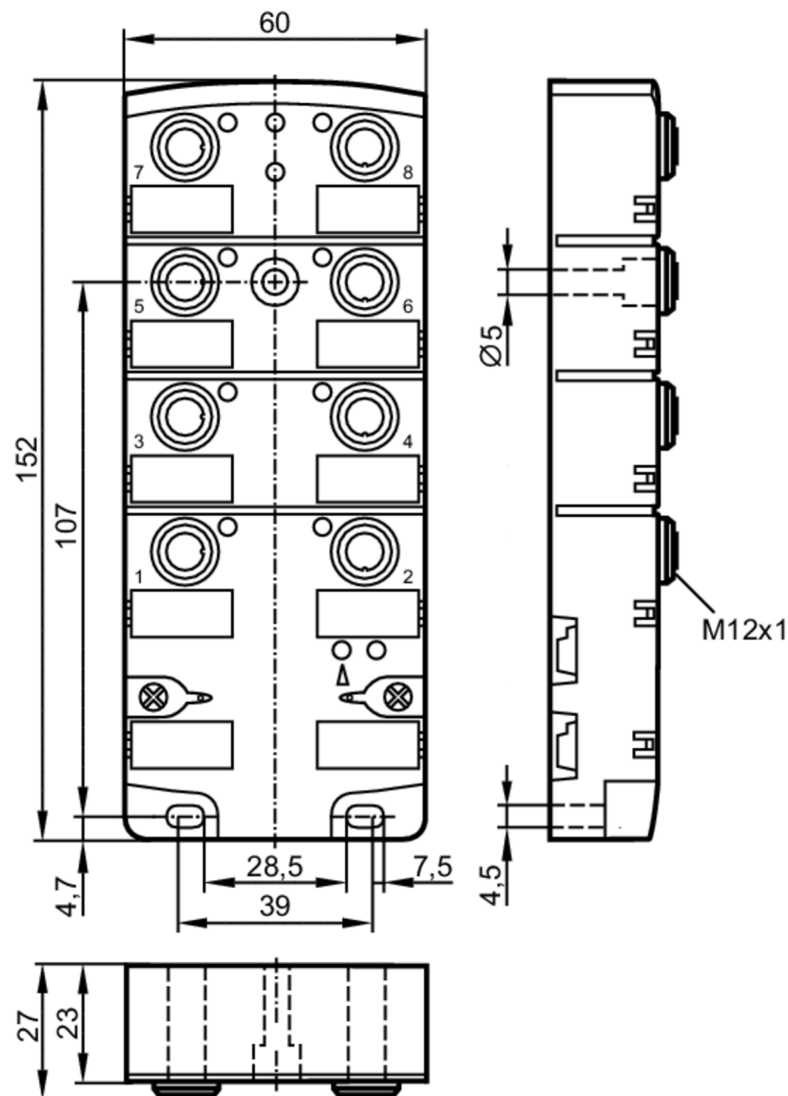

Application	
Application	field installation
Electrical data	
Operating voltage [V]	26.5...31.6 DC
Max. current consumption from AS-i [mA]	250
Max. current load total [A]	4
Additional voltage supply [V]	10...30 DC; (AUX)
Max. current consumption from additional supply [mA]	4000; (AUX)
Integrated watchdog	yes
Inputs / outputs	
Number of inputs and outputs	Number of digital inputs: 4; Number of digital outputs: 4



AS-Interface CompactLine module


CompactModule 4DI 4DO T M12

Inputs		
Number of digital inputs	4	
Input circuit of digital inputs	PNP; (type 2 according to IEC 61131-2)	
Sensor supply of the inputs	AS-i	
Voltage supply [V]	20...30; (DC)	
Max. total current rating of inputs [mA]	200	
Input current limitation [mA]	15	
Input current High [mA]	6...10	
Input current low [mA]	0...2	
Switching level high [V]	> 11	
Digital inputs protected against short circuits	yes	
Outputs		
Number of digital outputs	4	
Circuit	PNP	
Voltage range DC [V]	10...30; (AUX)	
Max. current load per output [mA]	2000; (utilization category DC-13 (control of electromagnets): 20 W (IEC 60947-5-1))	
Max. current load outputs total [A]	4	
Short-circuit proof	yes	
Electrically separated	yes	
Actuator supply outputs	AUX	
Operating conditions		
Ambient temperature [°C]	-25...80	
Storage temperature [°C]	-20...80	
Max. relative air humidity [%]	90; (non condensing)	
Max. height above sea level [m]	2000	
Protection	IP 67; (when flat cables are used E7400x / E7401x)	
Tests / approvals		
EMC	EN 61000-6-2	
	EN 62026-2	
	EN 50581	
MTTF [years]	193	
UL approval	voltage supply	Class 2



AS-Interface CompactLine module

CompactModule 4DI 4DO T M12

AS-i classification					
AS-i version		2.11; 3.0			
AS-i addressing		IR addressing possible			
Extended addressing mode		no			
AS-i profile		S-7.0.E			
AS-i I/O configuration [hex]		7			
AS-i ID code [hex]		0.E			
AS-i certificate		46001			
Data bits	Data bit	D0	D1	D2	D3
	Input	1	2	3	4
	Socket	I-1	I-2	I-3	I-4
	Pin	2+4	2+4	2+4	2+4
	Output	1	2	3	4
	Socket	O-1	O-2	O-3	O-4
	Pin	4	4	4	4
Mechanical data					
Weight [g]		376.5			
Type of mounting		AS-i flat cable connection			
Dimensions [mm]		152 x 60 x 27			
Material		PA; Socket: brass nickel-plated; threaded inserts in the lower part: brass nickel-plated; O-ring: FKM; Piercing contacts: CuSn6 nickel-plated and tin-plated			
Displays / operating elements					
Display	Switching status		LED, yellow I1...I4, O1...O4		
	Power		LED, green AS-i, AUX		
	errors		LED, red		
Electrical connection					
Module connection		Flachkabel			
Accessories					
Accessories (optional)		stainless steel sleeve, for installation in case of high mechanical stress , E70402			
Remarks					
Remarks	Do not connect any of the following points to an external potential:				
	I-, I+, I1, I2, I3, I4				
	The connections are electrically connected with the AS-i cable.				
Pack quantity		1 pcs.			
Electrical connection - Inputs					
Connector: M12; coding: A					
					

AC2412




AS-Interface CompactLine module

CompactModule 4DI 4DO T M12

Inputs	
1	Sensor supply L+
2+4	Data input 1 internally bridged
3	Sensor supply L-
5	functional earth

Electrical connection - Outputs

Connector: M12; coding: A



Outputs	
3	External voltage AUX -
4	Switching output
5	functional earth (FE)
1, 2	not used